



PVDF Paint System




Linen White (81)¹

SR = 0.73	TE = 0.86	SRI = 89
-----------	-----------	----------



Khaki (88)

SR = 0.35	TE = 0.87	SRI = 37
-----------	-----------	----------




Classic Green (66)

SR = 0.32	TE = 0.86	SRI = 33
-----------	-----------	----------



Zinc Grey (29)

SR = 0.41	TE = 0.86	SRI = 45
-----------	-----------	----------



Burnished Slate (49)

SR = 0.30	TE = 0.85	SRI = 30
-----------	-----------	----------




Ocean Blue (35)

SR = 0.29	TE = 0.86	SRI = 29
-----------	-----------	----------



Patriot Red (73)


SR = 0.46	TE = 0.86	SRI = 52
-----------	-----------	----------



Acrylic Coated Galvalume[®] (41)²


SR = 0.67	TE = 0.14	SRI = 56
-----------	-----------	----------

MS Colorfast45[®] Paint System




Polar White (80)

SR = 0.58	TE = 0.87	SRI = 68
-----------	-----------	----------



White (30)

SR = 0.57	TE = 0.88	SRI = 67
-----------	-----------	----------



Light Stone (63)

SR = 0.50	TE = 0.88	SRI = 58
-----------	-----------	----------



Mocha Tan (22)

SR = 0.52	TE = 0.87	SRI = 60
-----------	-----------	----------



Brown (12)

SR = 0.31	TE = 0.87	SRI = 32
-----------	-----------	----------



Burgundy (15)

SR = 0.25	TE = 0.87	SRI = 24
-----------	-----------	----------



Patriot Red (73)

SR = 0.35	TE = 0.88	SRI = 38
-----------	-----------	----------



Red (24)

SR = 0.30	TE = 0.86	SRI = 30
-----------	-----------	----------



Burnished Slate (49)

SR = 0.31	TE = 0.87	SRI = 32
-----------	-----------	----------



Ocean Blue (35)

SR = 0.30	TE = 0.88	SRI = 31
-----------	-----------	----------



Hawaiian Blue (70)

SR = 0.32	TE = 0.87	SRI = 33
-----------	-----------	----------



Charcoal (17)

SR = 0.30	TE = 0.87	SRI = 31
-----------	-----------	----------



Ash Grey (25)

SR = 0.37	TE = 0.88	SRI = 40
-----------	-----------	----------



Forest Green (26)

SR = 0.27	TE = 0.87	SRI = 27
-----------	-----------	----------



Patina Green (58)

SR = 0.29	TE = 0.86	SRI = 29
-----------	-----------	----------



Black (06)














SR = 0.30	TE = 0.88	SRI = 31
-----------	-----------	----------

(Color Code) • SR = Initial Solar Reflectance • TE = Thermal Emittance • SRI = Solar Reflectance Index



All Colors Meet or Exceed ENERGY STAR[®] Steep Slope Requirements
¹ Meets or Exceeds ENERGY STAR[®] Low Slope Requirements
² Non-Painted Finish

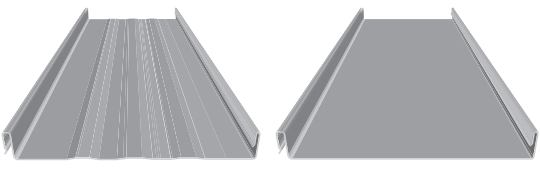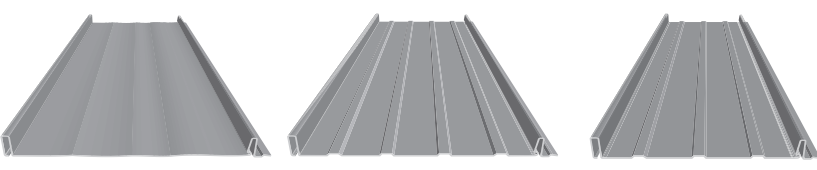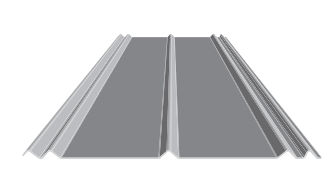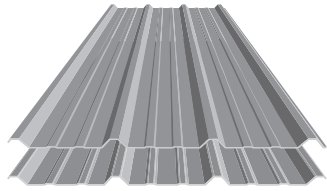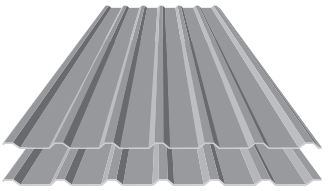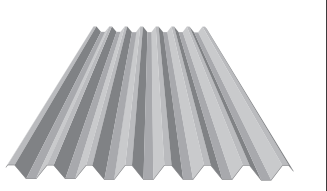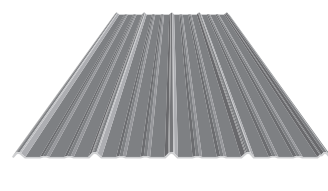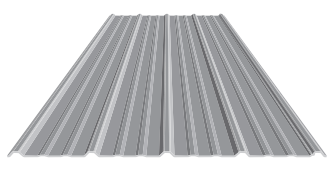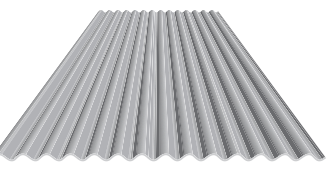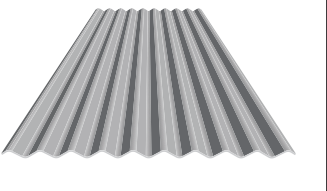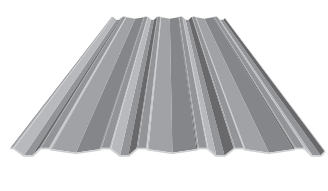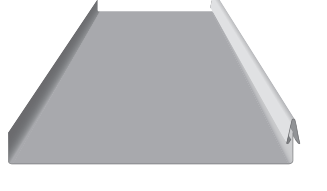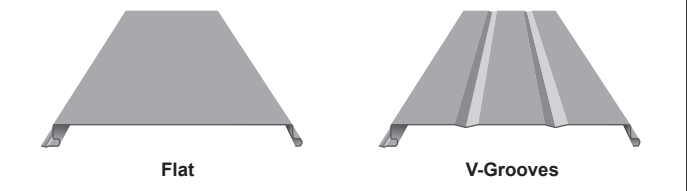COMMON 26 GAUGE PANEL PROFILES (COVERAGE)

Vertical Seam (12" & 16")  <p style="text-align: center;">Striated Flat Pan</p>		Image II (12" & 16")  <p style="text-align: center;">Striated 16" Minor Rib 12" Minor Rib</p>		
5V-Crimp (24") 	PBR-Panel/R-Panel (36") 	PBU-Panel/U-Panel (36") 	V-Line 32 (32") 	
Classic Rib® (36") 	Pro-Panel II® (36") 	7/8" Corrugated (varies) 	2.5" Corrugated (varies) 	
Span-Line 36A (36") 	Mini-Batten (12" & 16") 	Soffit Panel (12")  <p style="text-align: center;">Flat V-Grooves</p>		

Panels are also available in other gauges, please inquire. Not all colors and gauges are stocked at all branches. Color samples are close representations but are limited by processing and viewing conditions. Actual samples are available by request. For all specific warranty, application, installation and technical information regarding these products, contact your sales representative.

PVDF PAINT PERFORMANCE

Salt Spray Resistance

ASTM B 117	1,000 Hours	Creep from scribe no more than 1/8", no blisters
------------	-------------	--

Humidity Resistance

ASTM D 2247	2,000 Hours	No blisters, cracking or peeling
-------------	-------------	----------------------------------

Abrasion Resistance

ASTM D 968	Method A	65 ± 5 liters/mil falling sand
------------	----------	--------------------------------

Chalk Resistance

ASTM D 4214	2,000 Hours	No chalking greater #8 rating
-------------	-------------	-------------------------------

MS COLORFAST45® PAINT PERFORMANCE

Salt Spray Resistance

ASTM B 117	1,000 Hours	Creep from scribe no more than 1/8", no blisters
------------	-------------	--

Humidity Resistance

ASTM D 2247	1,200 Hours	No blisters, cracking or peeling
-------------	-------------	----------------------------------

Abrasion Resistance

ASTM D 968	Method A	30 liters/mil falling sand
------------	----------	----------------------------

Chalk Resistance

ASTM D 4214	2,000 Hours	No chalking greater #8 rating
-------------	-------------	-------------------------------

11-2015 1095



metalsales.us.com

Bay City, MI: 888.777.7640
 Deer Lake, PA: 800.544.2577
 Denver, CO: 800.289.7663
 Detroit Lakes, MN: 888.594.1394

Fort Smith, AR: 877.452.3915
 Independence, MO: 800.747.0012
 Jacksonville, FL: 800.394.4419
 Jefferson, OH: 800.321.5833

Mocksville, NC: 800.228.6119
 Nashville, TN: 800.251.8508
 Rock Island, IL: 800.747.1206
 Rogers, MN: 800.328.9316

Sellersburg, IN: 800.999.7777
 Sioux Falls, SD 888.299.0024
 Temple, TX: 800.543.4415